

Engineered For Safety


Application Designed: Portable Double Scissor Lift Table 10,000lbs. Capacity.

A Double Scissor Lift Table used for a maximum loads of 10,000 lbs. and a cantilevered load, over the ends, of 2000 lbs. The unit has a 8 foot by 12 foot platform. The lift is used to insert cylindrical shaped objects into a cavity as part of the manufacturing assembly process. The lift table is equipped with large casters and tow package so that the user can easily move the lift table to variable range of different locations within their facility to make the unit more stable, the lift table is equipped with adjustable swing out floor lock/stabilizers. As indicated above the lift table is engineered to accommodate cantilever loads safely. The lift was ordered with a custom white paint job to match with their requirements.

See page 2 for additional photos





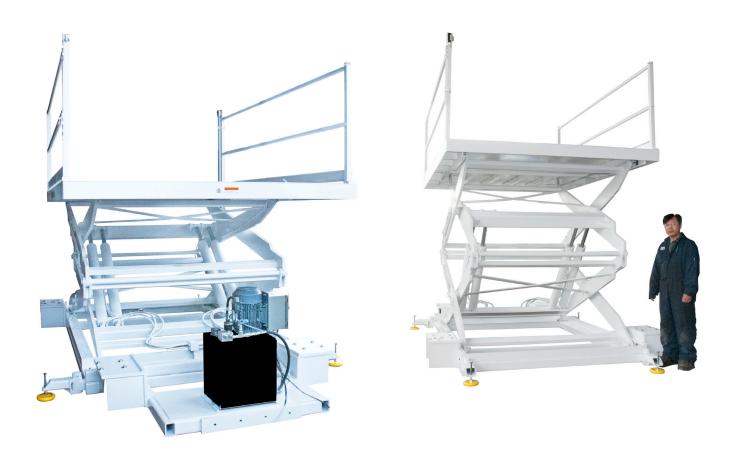



PENTALIFT EQUIPMENT CORPORATION

P O Box 1510 Buffalo NY U.S.A. 14240-1510 P O Box 1060 Guelph ON Canada N1H 6N1 Website: www.pentalift.com Phone (519) 763-3625 Fax (519) 763-2894 Phone (519) 763-3625 Fax (519) 763-2894 Email: lift@pentalift.com